


SUPERIOR ENGINEERING INC.


**SUPERIOR
COIL RAMM**

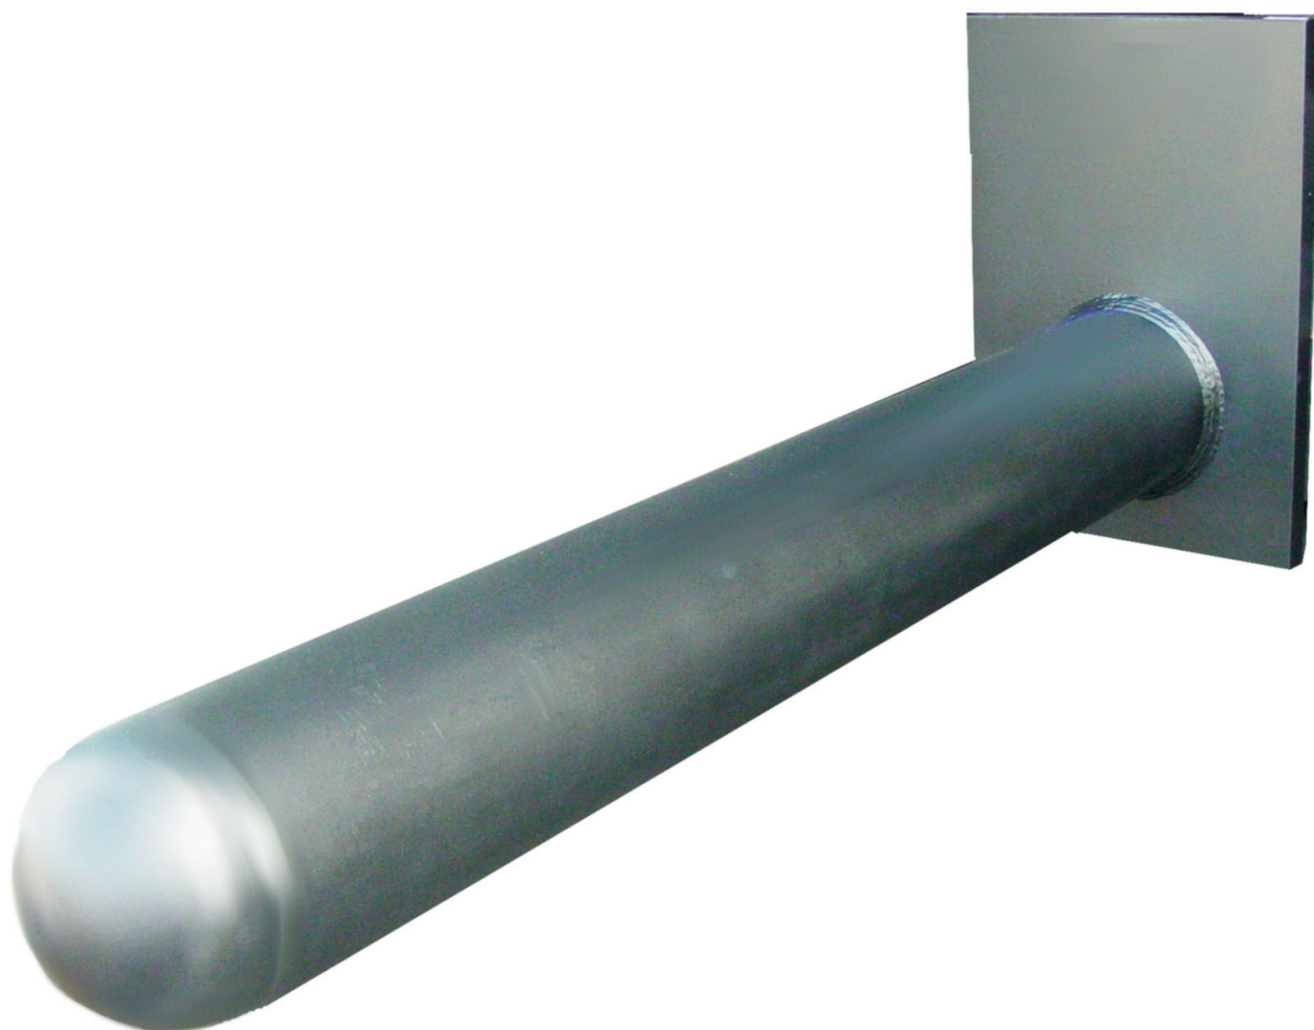

SE SUPERIOR ENGINEERING 1-800-359-3052
WWW.SUPERIORENG.COM

SUPERIOR COIL RAMS

**CARRIAGE MOUNTED
SHAFT MOUNTED
CAPACITY UP TO 50,000#
OSHA AND ANSI/ASME COMPLIANT
AMERICAN MADE
4" - 16" DIAMETER**

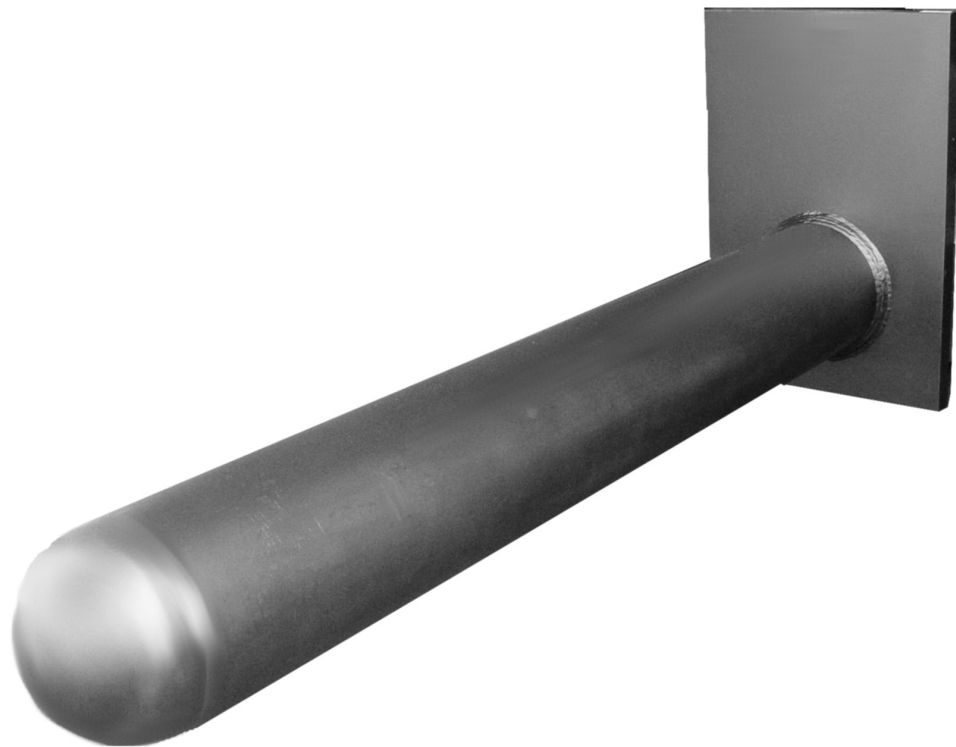

COIL RAM SPECIFICATIONS

| MODEL NO | CAP. LBS | ITA CLASS | LENGTH | DIA. (IN) | LLC (IN) | HCG (IN) | WEIGHT |
|----------|----------|-----------|--------|-----------|----------|----------|--------|
|----------|----------|-----------|--------|-----------|----------|----------|--------|

FOR LIFT TRUCKS UP TO 3000 LB. CAPACITY

| | | | | | | | |
|---------|------|----|----|---|------|------|-----|
| CR4-24A | 3000 | II | 24 | 4 | 1.25 | 6.0 | 155 |
| CR4-36A | 3000 | II | 36 | 4 | 1.25 | 8.2 | 165 |
| CR4-48A | 3000 | II | 48 | 4 | 1.25 | 12.6 | 180 |
| CR4-60A | 2400 | II | 60 | 4 | 1.25 | 14.8 | 195 |

FOR LIFT TRUCKS UP TO 5500 LB. CAPACITY

| | | | | | | | |
|---------|------|----|----|---|------|------|-----|
| CR5-24A | 5500 | II | 24 | 5 | 1.50 | 7.1 | 190 |
| CR5-36A | 5500 | II | 36 | 5 | 1.50 | 10.3 | 205 |
| CR5-48A | 5500 | II | 48 | 5 | 1.50 | 14.5 | 222 |
| CR5-60A | 4400 | II | 60 | 5 | 1.50 | 17.7 | 238 |

FOR LIFT TRUCKS UP TO 8000 LB. CAPACITY

| | | | | | | | |
|---------|------|-----|----|---|------|------|-----|
| CR6-24B | 8000 | III | 24 | 6 | 1.75 | 10.2 | 190 |
| CR6-36B | 8000 | III | 36 | 6 | 1.75 | 15.4 | 210 |
| CR6-48B | 8000 | III | 48 | 6 | 1.75 | 18.6 | 230 |
| CR6-60B | 6400 | III | 60 | 6 | 1.75 | 20.8 | 250 |

FOR LIFT TRUCKS UP TO 10,000 LB. CAPACITY

| | | | | | | | |
|---------|-------|-----|----|---|------|------|-----|
| CR7-36B | 10000 | III | 36 | 7 | 2.00 | 11.2 | 260 |
| CR7-48B | 10000 | III | 48 | 7 | 2.00 | 16.1 | 285 |
| CR7-60B | 8000 | III | 60 | 7 | 2.00 | 20.6 | 320 |
| CR7-72B | 6600 | III | 72 | 7 | 2.00 | 25.4 | 350 |

FOR LIFT TRUCKS UP TO 14,000 LB. CAPACITY

| | | | | | | | |
|---------|-------|----|----|---|------|------|-----|
| CR7-36C | 14000 | IV | 36 | 7 | 2.00 | 12.9 | 295 |
| CR7-48C | 14000 | IV | 48 | 7 | 2.00 | 17.8 | 325 |
| CR7-60C | 11200 | IV | 60 | 7 | 2.00 | 22.4 | 360 |
| CR7-72C | 9300 | IV | 72 | 7 | 2.00 | 28.6 | 410 |

FOR LIFT TRUCKS UP TO 17,000 LB. CAPACITY

| | | | | | | | |
|---------|-------|------|----|---|------|------|-----|
| CR8-36N | 17000 | NONE | 36 | 8 | 2.00 | 15.9 | 325 |
| CR8-48N | 17000 | NONE | 48 | 8 | 2.00 | 20.1 | 361 |
| CR8-60N | 13600 | NONE | 60 | 8 | 2.00 | 26.3 | 400 |
| CR8-72N | 11300 | NONE | 72 | 8 | 2.00 | 30.6 | 435 |

FOR LIFT TRUCKS UP TO 20,000 LB. CAPACITY

| | | | | | | | |
|---------|-------|------|----|---|------|------|------|
| CR9-36N | 20000 | NONE | 36 | 9 | 2.25 | 14.2 | 1000 |
| CR9-48N | 20000 | NONE | 48 | 9 | 2.25 | 18.9 | 1100 |
| CR9-60N | 16000 | NONE | 60 | 9 | 2.25 | 25.3 | 1200 |
| CR9-72N | 13300 | NONE | 72 | 9 | 2.25 | 29.1 | 1300 |

FOR LIFT TRUCKS UP TO 25,000 LB. CAPACITY

| | | | | | | | |
|----------|-------|------|----|----|------|------|------|
| CR10-36N | 25000 | NONE | 36 | 10 | 2.50 | 12.7 | 1200 |
| CR10-48N | 25000 | NONE | 48 | 10 | 2.50 | 15.6 | 1310 |
| CR10-60N | 20000 | NONE | 60 | 10 | 2.50 | 20.9 | 1420 |
| CR10-72N | 16600 | NONE | 72 | 10 | 2.50 | 26.8 | 1530 |

FOR LIFT TRUCKS UP TO 30,000 LB. CAPACITY

| | | | | | | | |
|----------|-------|------|----|----|------|------|------|
| CR12-36N | 30000 | NONE | 36 | 12 | 2.50 | 15.6 | 1340 |
| CR12-48N | 30000 | NONE | 48 | 12 | 2.50 | 21.6 | 1450 |
| CR12-60N | 24000 | NONE | 60 | 12 | 2.50 | 24.8 | 1510 |
| CR12-72N | 20000 | NONE | 72 | 12 | 2.50 | 28.9 | 1570 |

FOR LIFT TRUCKS UP TO 40,000 LB. CAPACITY

| | | | | | | | |
|----------|-------|------|----|----|------|------|------|
| CR14-48N | 40000 | NONE | 48 | 14 | 2.75 | 12.7 | 2000 |
| CR14-60N | 32000 | NONE | 60 | 14 | 2.75 | 15.9 | 2200 |
| CR14-72N | 26600 | NONE | 72 | 14 | 2.75 | 21.6 | 2400 |

FOR LIFT TRUCKS UP TO 50,000 LB. CAPACITY

| | | | | | | | |
|----------|-------|------|----|----|------|------|------|
| CR16-48N | 50000 | NONE | 48 | 16 | 3.00 | 10.6 | 3000 |
| CR16-60N | 40000 | NONE | 60 | 16 | 3.00 | 16.9 | 3400 |
| CR16-72N | 33300 | NONE | 72 | 16 | 3.00 | 27.3 | 3600 |