


EZ-LOADER DETAIL

Shown below is the EZ-loader with a buggy shown in the unload position. The buggy would be reversed with the slope away from the operator for loading.

Standards

- Carts are designed per application
- Auxiliary mast has 27.0" of lift. Contact Factory for more or less lift.
- 9.0" inch wide conveyor roller width
- Conveyor Length specified by application
- Total of 45.0" from ground to top of conveyor
- Auxiliary mast controls are located in front of conveyor for easy access.

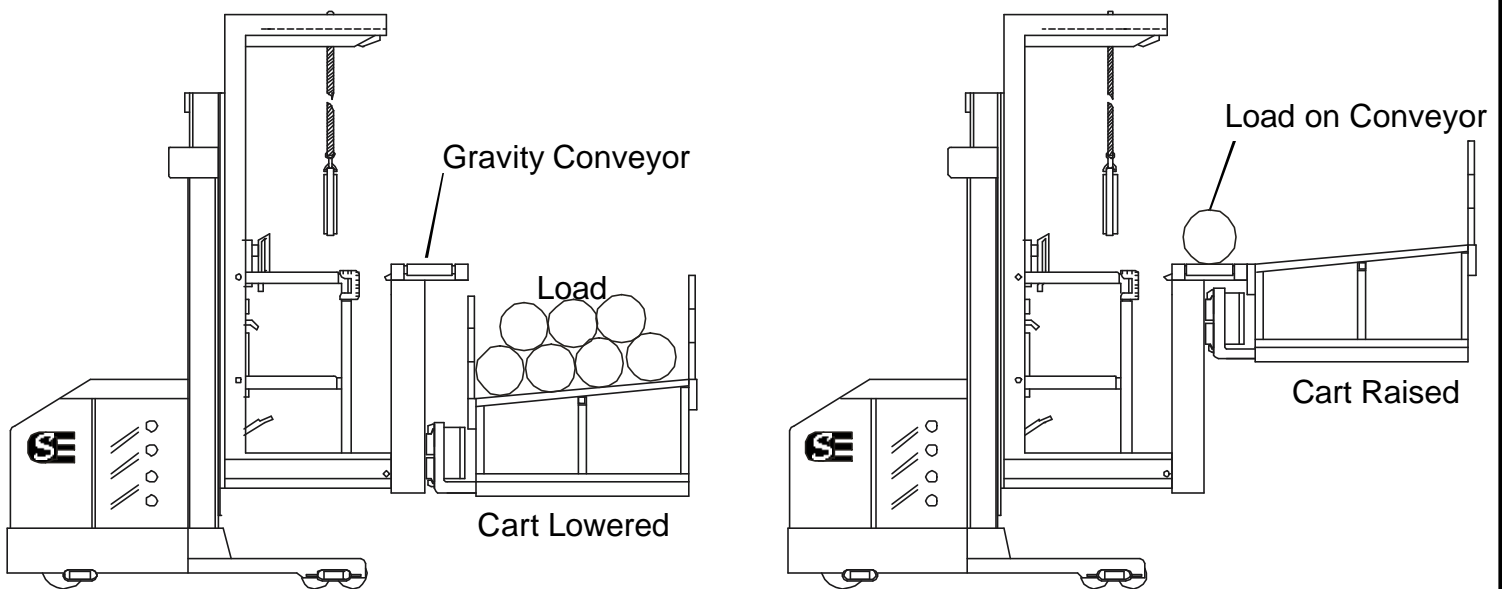

SUPERIOR
SE
ENGINEERING

SUPERIOR ENGINEERING, PO BOX 547, BELTON, SC 29627
TEL (864) 226-8799 OR 1-800-359-3052 FAX (864)231-6718
WEBSITE ADDRESS: WWW.SUPERIORENG.COM