


SUPERIOR ENGINEERING INC.


SUPERIOR COIL RAMM

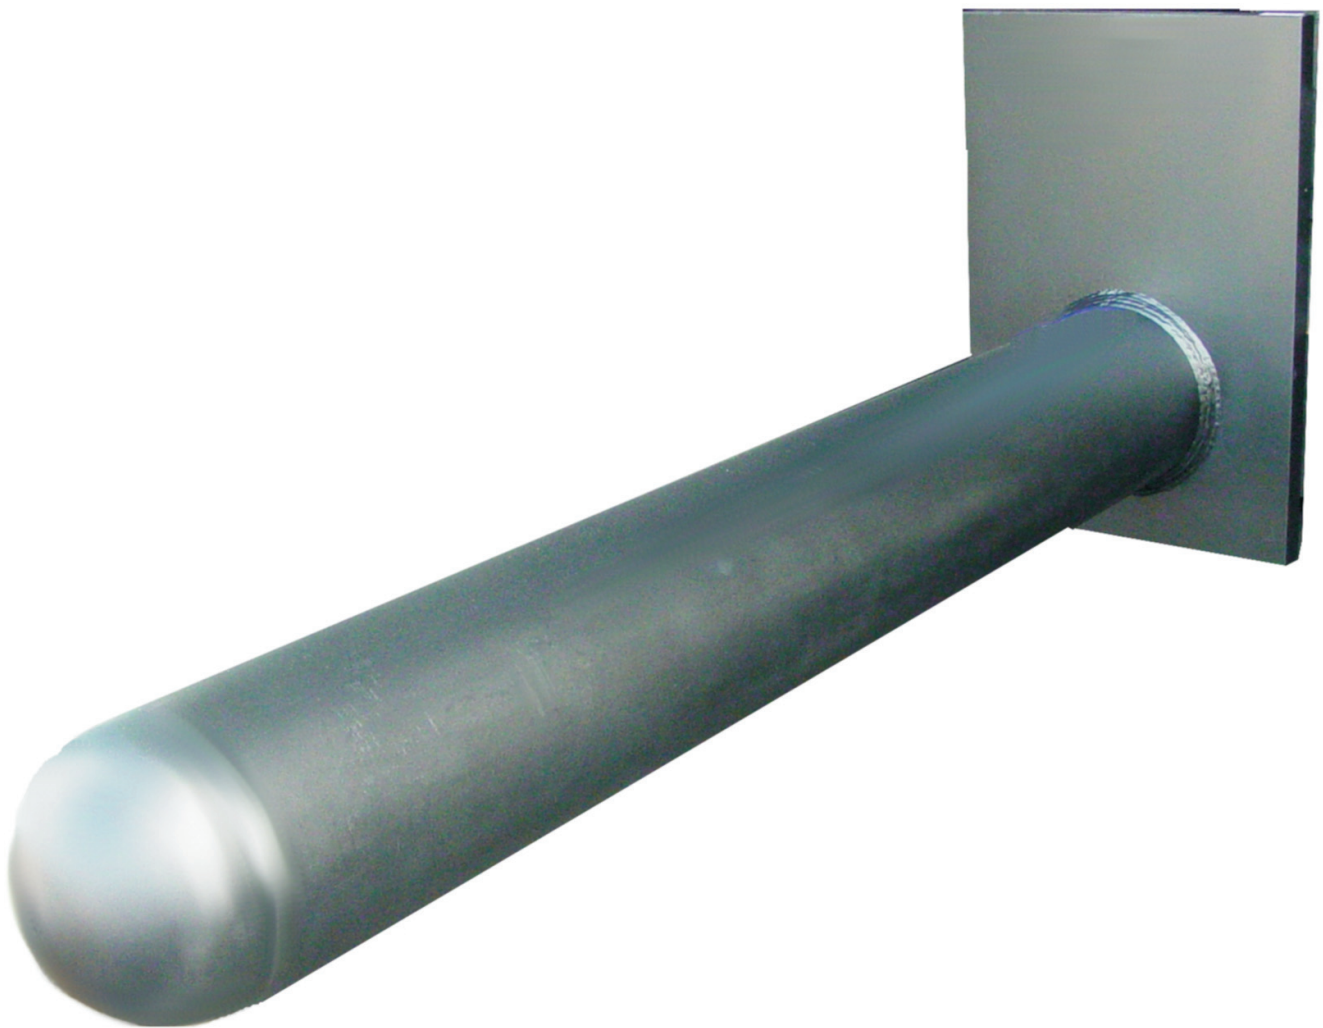

SE SUPERIOR 1-800-359-3052
ENGINEERING WWW.SUPERIORENG.COM

SUPERIOR COIL RAMS

**CARRIAGE MOUNTED
SHAFT MOUNTED
CAPACITY UP TO 50,000#
OSHA AND ANSI/ASME COMPLIANT
AMERICAN MADE
4" - 16" DIAMETER**

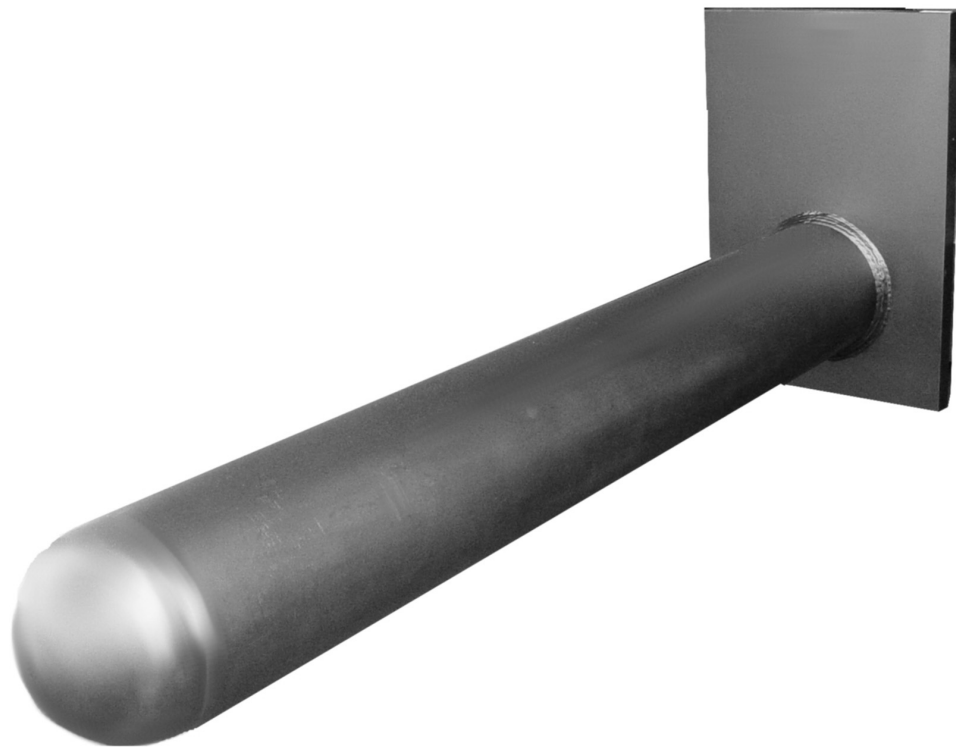

COIL RAM SPECIFICATIONS

MODEL NO	CAP. LBS	ITA CLASS	LENGTH	DIA. (IN)	LLC (IN)	HCG (IN)	WEIGHT
----------	----------	-----------	--------	-----------	----------	----------	--------

FOR LIFT TRUCKS UP TO 3000 LB. CAPACITY

CR4-24A	3000	II	24	4	1.25	6.0	155
CR4-36A	3000	II	36	4	1.25	8.2	165
CR4-48A	3000	II	48	4	1.25	12.6	180
CR4-60A	2400	II	60	4	1.25	14.8	195

FOR LIFT TRUCKS UP TO 5500 LB. CAPACITY

CR5-24A	5500	II	24	5	1.50	7.1	190
CR5-36A	5500	II	36	5	1.50	10.3	205
CR5-48A	5500	II	48	5	1.50	14.5	222
CR5-60A	4400	II	60	5	1.50	17.7	238

FOR LIFT TRUCKS UP TO 8000 LB. CAPACITY

CR6-24B	8000	III	24	6	1.75	10.2	190
CR6-36B	8000	III	36	6	1.75	15.4	210
CR6-48B	8000	III	48	6	1.75	18.6	230
CR6-60B	6400	III	60	6	1.75	20.8	250

FOR LIFT TRUCKS UP TO 10,000 LB. CAPACITY

CR7-36B	10000	III	36	7	2.00	11.2	260
CR7-48B	10000	III	48	7	2.00	16.1	285
CR7-60B	8000	III	60	7	2.00	20.6	320
CR7-72B	6600	III	72	7	2.00	25.4	350

FOR LIFT TRUCKS UP TO 14,000 LB. CAPACITY

CR7-36C	14000	IV	36	7	2.00	12.9	295
CR7-48C	14000	IV	48	7	2.00	17.8	325
CR7-60C	11200	IV	60	7	2.00	22.4	360
CR7-72C	9300	IV	72	7	2.00	28.6	410

FOR LIFT TRUCKS UP TO 17,000 LB. CAPACITY

CR8-36N	17000	NONE	36	8	2.00	15.9	325
CR8-48N	17000	NONE	48	8	2.00	20.1	361
CR8-60N	13600	NONE	60	8	2.00	26.3	400
CR8-72N	11300	NONE	72	8	2.00	30.6	435

FOR LIFT TRUCKS UP TO 20,000 LB. CAPACITY

CR9-36N	20000	NONE	36	9	2.25	14.2	1000
CR9-48N	20000	NONE	48	9	2.25	18.9	1100
CR9-60N	16000	NONE	60	9	2.25	25.3	1200
CR9-72N	13300	NONE	72	9	2.25	29.1	1300

FOR LIFT TRUCKS UP TO 25,000 LB. CAPACITY

CR10-36N	25000	NONE	36	10	2.50	12.7	1200
CR10-48N	25000	NONE	48	10	2.50	15.6	1310
CR10-60N	20000	NONE	60	10	2.50	20.9	1420
CR10-72N	16600	NONE	72	10	2.50	26.8	1530

FOR LIFT TRUCKS UP TO 30,000 LB. CAPACITY

CR12-36N	30000	NONE	36	12	2.50	15.6	1340
CR12-48N	30000	NONE	48	12	2.50	21.6	1450
CR12-60N	24000	NONE	60	12	2.50	24.8	1510
CR12-72N	20000	NONE	72	12	2.50	28.9	1570

FOR LIFT TRUCKS UP TO 40,000 LB. CAPACITY

CR14-48N	40000	NONE	48	14	2.75	12.7	2000
CR14-60N	32000	NONE	60	14	2.75	15.9	2200
CR14-72N	26600	NONE	72	14	2.75	21.6	2400

FOR LIFT TRUCKS UP TO 50,000 LB. CAPACITY

CR16-48N	50000	NONE	48	16	3.00	10.6	3000
CR16-60N	40000	NONE	60	16	3.00	16.9	3400
CR16-72N	33300	NONE	72	16	3.00	27.3	3600